

HOW TO MEASURE - RECESS FIT

How to Measure for a Recess Window

You will need a Metal tape measure (not cloth as it may stretch), ladder, pen and paper.
We recommended that you measure in millimetres (mm).



Recess Window (Inside Window Frame)


This is where the roller Blind is fitted inside the window recess:

- « Width – Measure full width measurements top, middle, and bottom (See the above). Take the smallest measurement.
- « Drop – Measure the full drop measurements left, middle, and right (See the above). Take the smallest measurement.

We'll do the deduction this will guarantee you get the perfect fit.



Roller Blind depth required:

Check that your window recess is deep enough to fit the blind inside. Single roller is 60mm and double is 100mm.

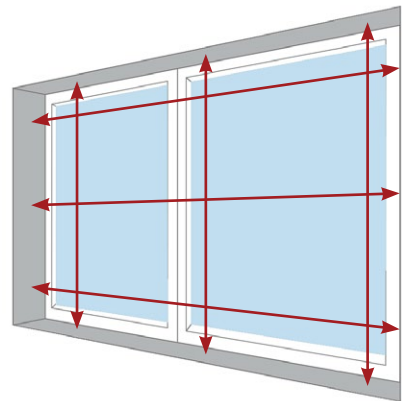

Important Notes

- « The Bracket and operating mechanism are included in the width of the roller blind – they all have to fit inside the window recess. This will result in the fabric on the roller blind bring approximately 35mm narrow than the width of the recess. This can result in a noticeable light gap around the edges of the blind in the recess; therefore, for best possible blackout, we recommend face fitting rather than recess fitting roller blinds.
- « Please ensure when measuring you look for **any obstructions such as door or window handles, locks, etc.** This will allow your blind to move freely.
- « If you have tiles inside the recess (regularly found in bathroom and kitchens), the distance between these is likely to be the narrowest part of the recess. **Measure between the tiles to get your recess width.**
- « **Double check the measurements before submitting your order.**

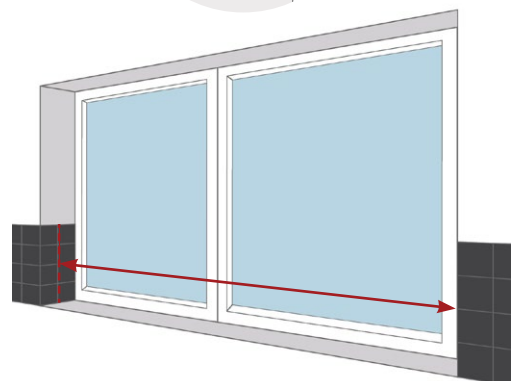

Still not 100% confident with your measurements, please gives us a call and talk to one of our dedicated specialists by calling 1300 614 797. Or mega-diy-blinds@carpetcall.com.au